


## Thermoelectric cooling unit



### Description

<b>Order Number:</b>	3030303
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress Protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus
<b>Accessories:</b>	 <a href="#">Condensate Kit 3030 / 3050</a>

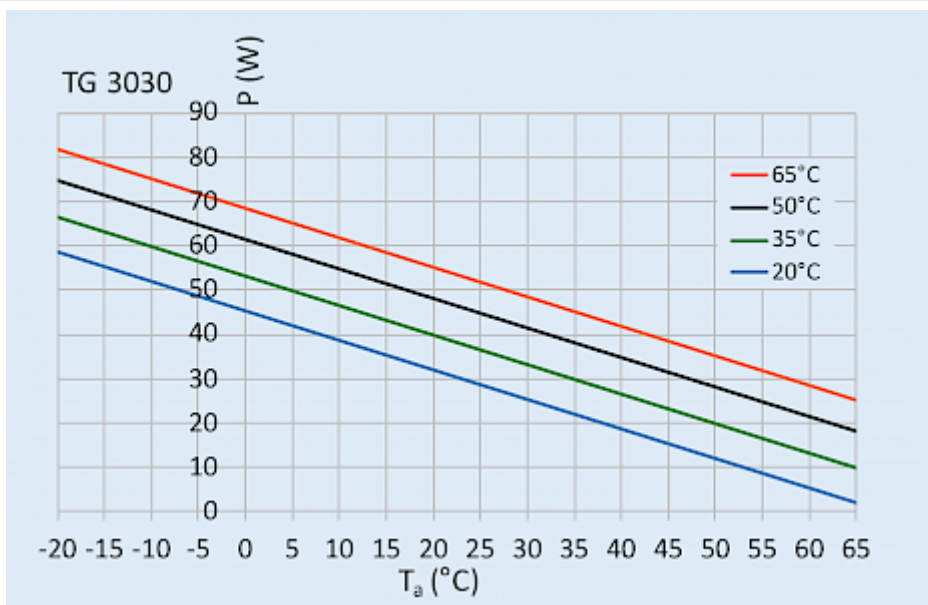
## Technical Data

<b>Cooling capacity L35L35 (EN14511-3):</b>	30 W
<b>Operating Temperature Range:</b>	-20°C - 70°C
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 39 / 75 m <sup>3</sup> /h Cabinet air circuit: 20 / 62 m <sup>3</sup> /h
<b>Mounting:</b>	Recessed
<b>Dimensions A x B x C (D+E):</b>	110 x 154 x 132 (67+65) mm
<b>Weight:</b>	1.8 kg
<b>Cut out dimensions:</b>	122 x 90 mm
<b>Voltage / Frequency:</b>	12 V DC
<b>Current L35L35:</b>	2.8 A
<b>Starting current:</b>	4.3 A
<b>Max. current:</b>	2.9 A
<b>Nominal power L35L35:</b>	34 W
<b>Max. power:</b>	35 W
<b>Fuse:</b>	5 A (T)
<b>Connection:</b>	Connection terminal block

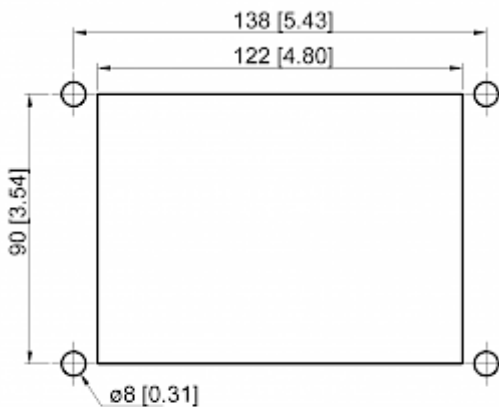
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

**Performance graph:**


click image to enlarge

**Cut Out Dimension:**

**Note:**

Primary dimensions in millimeters.  
 Secondary dimensions in inches.

click image to enlarge

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	30303034
<b>Box dimension</b>	244 x 187 x 174 mm
<b>Gross weight</b>	2.0 kg
<b>Taric code</b>	84158300