


# UFS NVENT ERIFLEX FLEXIBAR AND IBSB SUPPORT KIT



## CERTIFICATIONS



## FEATURES

Kit includes one rail and 24 retaining blocks

Create up to three 650 mm (25.6") supports capable of holding four nVent ERIFLEX Flexibar

Retaining blocks are halogen free

RoHS compliant

## SPECIFICATIONS

Table 1/2

Catalog Number	Article Number	Material	Conductor Width	Conductor Thickness	Width (W)	Height (H)
UFS-KIT	553590	Aluminum, Polyamide	15.5 – 120 mm	2 – 8 mm	30 mm	57.5 mm

Table 2/2


Catalog Number	Article Number	Length (L)	A	B	Unit Weight
UFS-KIT	553590	2000 mm	24 mm	15 mm	2.3 kg

## ADDITIONAL PRODUCT DETAILS

Recommended distance between supports is 400 mm (15 3/4").

## DIAGRAMS

---

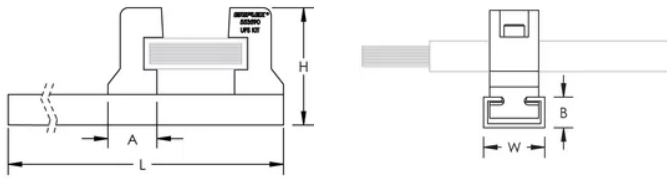

## WARNING

---

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical Support

### Europe

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

### Europe

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

### APAC

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:  
**nVent.com** **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**  
**TRACER**